

Package Contents

- Low Voltage Dimming Control with handle and mounting plate
- Mounting screws
- Wire nuts

Operation

The 0-10V DC Low Voltage Dimming Control is for use with LED lighting products such as the LUXdrive[™] A009 BuckBlock[™], A011 FlexBlock[™], 7011 ElaraStrip II[™], 9008 LuxStrip II[™], A006 LuxStrip II[™], 3021/3023 BuckPuck[™] LED drivers, and others compatible with a 0-10V current sinking control. Features logarithmic response and reverse polarity protection.




WARNING: Miswiring Low Voltage Dimming Control could cause permanent damage to dimmer.
Do Not connect this control to line voltage.
Do Not connect with power applied.
Maximum recommended operating current is 25mA.

Application Figures

A009 BuckBlocks[™], A011 FlexBlocks[™], or a combination of the two: Up to 25 units can be dimmed on a single Low Voltage Dimming Control.

When the drivers being controlled are within a few feet of each other, daisy-chain wiring (shown below) is fine. When dimming distant modules, a star wiring pattern (each driver with its own run of violet/gray wire back to the dimming control) and 18AWG wire is recommended.

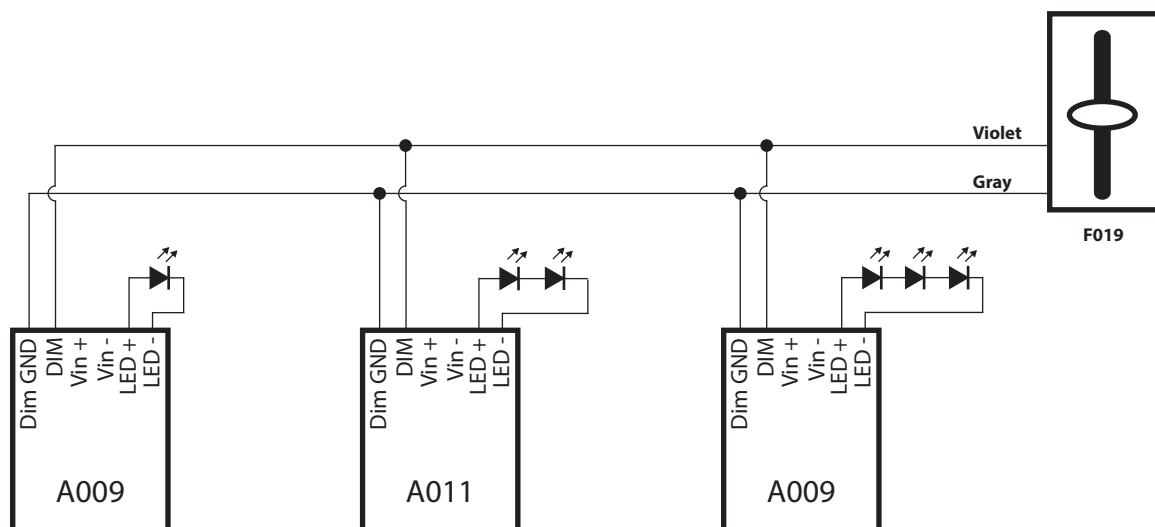


RoHS
Compliant
2002/95/EC



Application Figures Cont.

ElaraStrip IITM, 9008 LuxStrip IITM, and A006 LuxStrip IITM: Control up to 50 strips with a single Low Voltage Dimming Control.

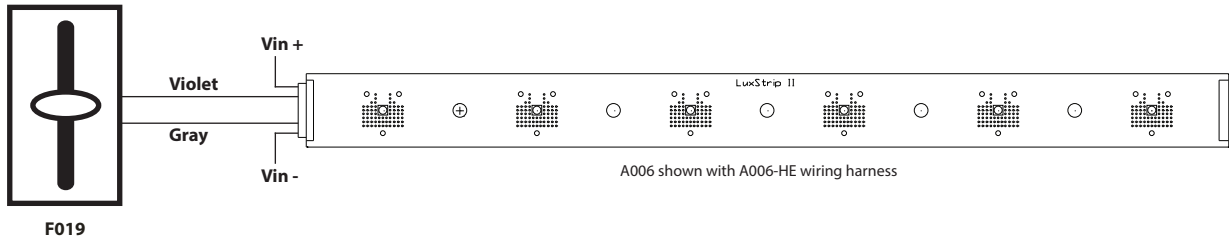

3021/3023 BuckPucksTM or 4015 BoostPucksTM: Control one to four BuckPucksTM or BoostPucksTM with a single Low Voltage Dimming Control. When controlling multiple units, connect the CTRL line of all units to the Dimming Control and connect **only one** REF line as shown below.

